MECHANICAL PRESS BENELLI
H-FRAME 250 ton

9500 Villach – A - Hans Gasser Platz, 6/B, Telefon +43 (0) 664 236 0505
FN 399399B | LG Klagenfurt | UID: AT U68029956
info@valmatrading.com – www.valmatrading.com

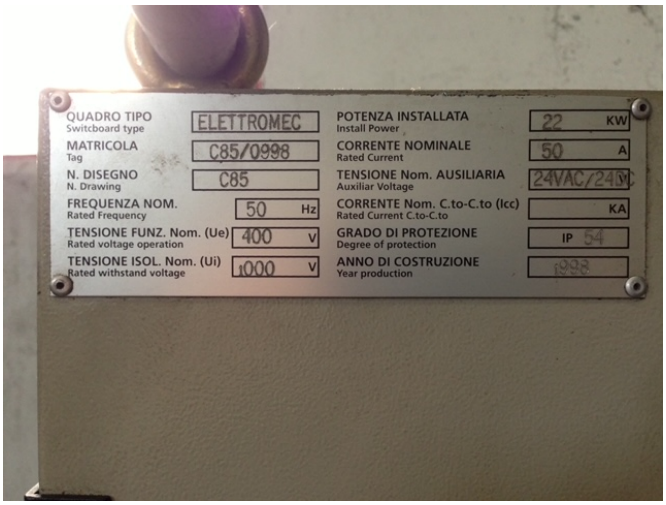
QUADRO TIPO
Switchboard type
ELETTROMEC
MATRICOLA
Tag
C85/0998
N. DISEGNO
N. Drawing
C85
FREQUENZA NOM.
Rated Frequency
50 Hz
TENSIONE FUNZ. Nom. (Ue)
Rated voltage operation
400 V
TENSIONE ISOL. Nom. (Ui)
Rated withstand voltage
1000 V
POTENZA INSTALLATA
Install Power
22 KW
CORRENTE NOMINALE
Rated Current
50 A
TENSIONE Nom. AUSILIARIA
Auxiliar Voltage
24VAC/24V
CORRENTE Nom. C.to-C.to (Icc)
Rated Current C.to-C.to
KA
GRADO DI PROTEZIONE
Degree of protection
IP 54
ANNO DI COSTRUZIONE
Year production
1998

Technical data

Nominal Power: 2500 KN
Dimension table: 1370 x 1000 mm
Dimension ram: 1350 x 965 mm
Stroke: 200 mm
Stroke par minute: 22-30 variable speed
Adjustable slide: 100 mm
BDC Light table-slide to the bottom dead center: 580 mm
TDC Top dead center: 780 mm
Lateral passage: 330 mm
Motor Power: max 18.5 Kw

Equipped with:

- safety barriers

Overall press dimension: 1900 x 2000 x 5000 mm
Weight: Kg. 25.000

Machine in excellent working condition
Electrical panel completely overhaulded complying with current regulations

Dati tecnici

Potenza Nominale: 2500 KN
Dimensione piano: 1370 x 1000 mm
Dimensione mazza: 1350 x 965 mm
Corsa: 200 mm
Colpi al minuto: 22-30 variable speed
Regolazione mazza: 100 mm
PMI Punto morto inferiore: 580 mm
PMS Punto morto superiore: 780 mm
Passaggio laterale: 330 mm
Potenza motore: max 18.5 Kw

Equipaggiata di :

- Barriere elettriche

Dimensioni di ingombro pressa: 1900 x 2000 x 5000 mm
Peso: Kg. 25.000

La pressa è in ottime condizioni di lavoro
Il quadro elettrico è stato completamente revisionato e corrisponde alle normative vigenti